

ALTO 1 - Regulator



BSPP female thread

G 1/8

Flow rate (l/min at 7 bar ?P : 1bar)

600

Operating pressure (bar)

Inlet: 15 Outlet: 0.5-10

Temperature

+5°C to +50 °C

Construction


Body : Aluminium
Polycarbonate bowl with
metallic protection

Equipped with

Manual drain

Description

Reference	BSPP female thread	Flow rate (l/min at 7 bar ΔP : 1bar)	Operating pressure (bar)
TR 0	G 1/8	600	Inlet: 15 Outlet: 0.5-10
TR 1	G 1/4	600	Inlet: 15 Outlet: 0.5-10
TR B21	G 1/4	600	Inlet: 15 Outlet: 0.2-2
TR B41	G 1/4	600	Inlet: 15 Outlet: 0.2-4

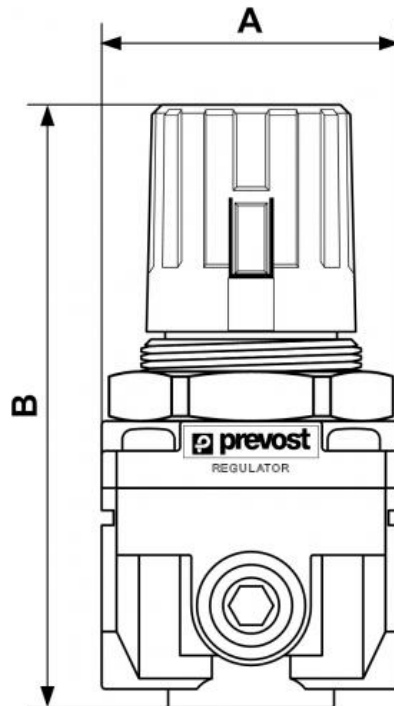

Dimensions

Reference	A mm	B mm
TR 0	40	81
TR 1	40	81
TR B21	40	81
TR B41	40	81