


ALTO 2 - Filter 25 and 5 µm



<u>BSPP female thread</u> G 3/8	<u>Flow rate (l/min at 6 bar ?P : 0.3bar)</u> 2250	<u>Max operating pressure (bar)</u> 12	<u>Filtration (µm)</u> 5
<u>Temperature</u> +5°C to +50 °C	<u>Construction</u> Body : Aluminium Polycarbonate bowl with metallic protection	<u>Equipped with</u> Manual drain	

Description				
Reference	BSPP female thread	Flow rate (l/min at 6 bar ΔP : 0.3bar)	Max operating pressure (bar)	Filtration (µm)
TF 2	G 3/8	2250	12	25
TF 205	G 3/8	2250	12	5

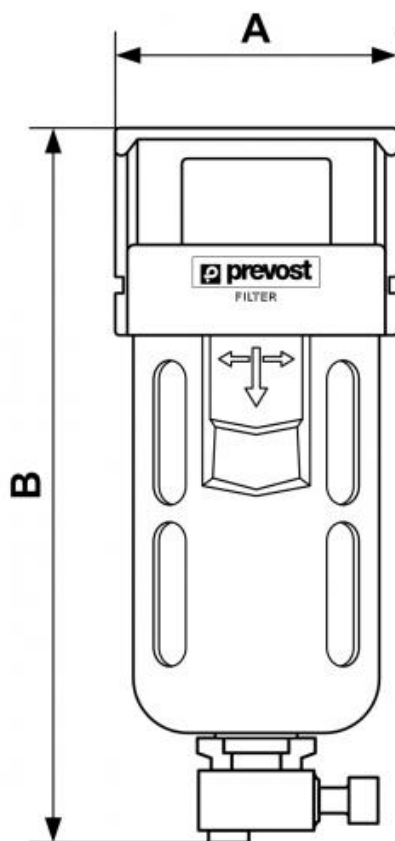

Dimensions

Reference	A mm	B mm
TF 2	55	140
TF 205	55	140