

## ALTO 2 - Regulator with gauge



### BSPP female thread

G 3/8

### Flow rate (l/min at 7 bar ?P : 1bar)

2500

### Operating pressure (bar)

Inlet: 15 Outlet: 0.5-10

### Temperature

+5°C to +50 °C

### Construction


Body : Aluminium  
Polycarbonate bowl with  
metallic protection

### Equipped with

Manual drain

## Description

Reference	BSPP female thread	Flow rate (l/min at 7 bar &#916;P : 1bar)	Operating pressure (bar)
<b>TR M2</b>	G 3/8	2500	Inlet: 15 Outlet: 0.5-10

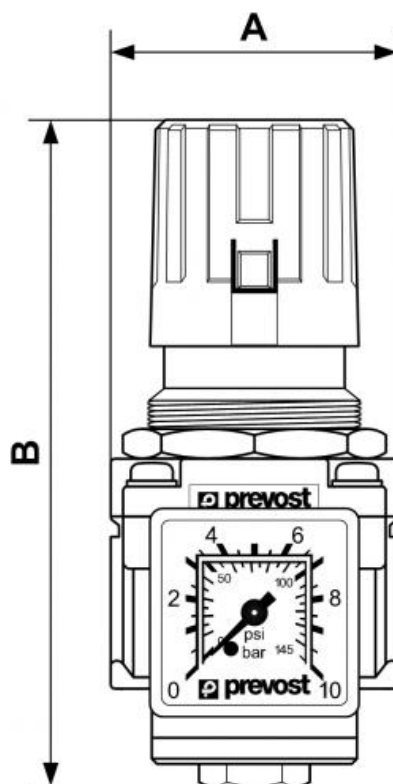

### Dimensions

Reference	A mm	B mm
<b>TR M2</b>	55	135