

## ALTO 3 - 20 bar Lubricator 20 bar



### BSPP female thread

G 1/2

### Flow rate (l/min at 6 bar

**?P : 0,5 bar)**

5650

### Max operating pressure

**(bar)**

20

### Temperature

+5°C to +50 °C

### Construction


Body : Aluminium  
Polycarbonate bowl with  
metallic protection

### Equipped with

Manual drain

## Description

Reference	BSPP female thread	Flow rate (l/min at 6 bar &#916;P : 0,5 bar)	Max operating pressure (bar)
<b>TL A3</b>	G 1/2	5650	20

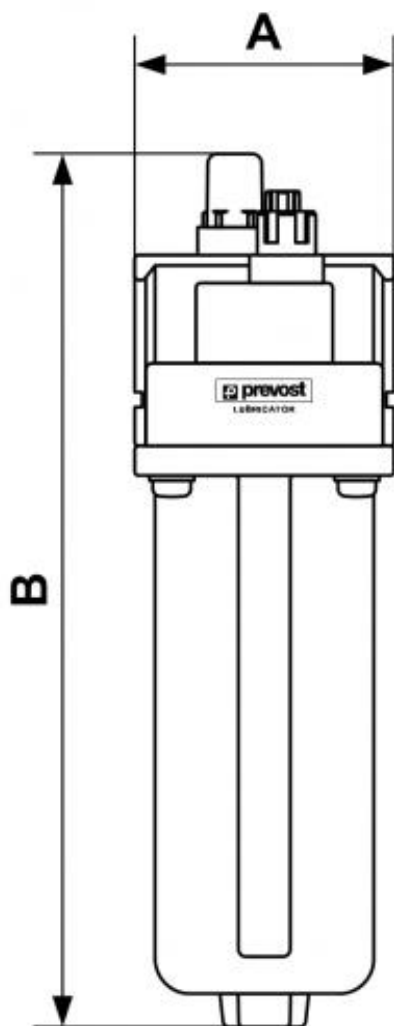

**Dimensions**

Reference	A mm	B mm
<b>TL A3</b>	70	236